

**TYCO R/C**

# 9.6V TURBO RECHARGEABLE NiCd BATTERY PACK INSTRUCTIONS

**CAUTION — ELECTRICALLY OPERATED PRODUCT**  
 NOT RECOMMENDED FOR CHILDREN UNDER 8 YEARS OF AGE. AS WITH ALL ELECTRIC PRODUCTS, PRECAUTIONS SHOULD BE OBSERVED DURING HANDLING AND USE TO PREVENT ELECTRIC SHOCK.


BATTERY CHARGER MODEL NO. 2997  
 INPUT: 120 VAC, .095A, 60 HZ ONLY  
 OUTPUT: 11.5 VDC, 1.05 VA

THE 9.6V NiCd (NICKEL CADMIUM) BATTERY PACK IS RECHARGEABLE AND FOR MAXIMUM PERFORMANCE, MUST BE CHARGED WITH THE TYCO MODEL NO. 2997 WALL PACK CHARGER. NiCd BATTERY PACK SUPPLIES MORE POWER THAN CONVENTIONAL ALKALINE OR CARBON/ZINC BATTERIES. YOUR CARS RUNNING TIME WILL VARY ACCORDING TO THE POWER REQUIRED BY YOUR CAR AND BY YOUR DRIVING STYLE. A HIGH PERFORMANCE CAR DRIVEN AT FULL SPEED WILL GIVE THE SHORTEST RUNNING TIME BETWEEN CHARGES. IN ORDER TO OBTAIN MAXIMUM PERFORMANCE FROM YOUR TYCO CAR, PLEASE READ ALL INSTRUCTIONS BEFORE USE.

9.6V NiCd BATTERY PACKS ARE TO BE USED IN TYCO R/C 9.6V TURBO CARS.

**THE BATTERY PACK IS NOT CHARGED, PLEASE CHARGE IT FOR 4 HOURS PRIOR TO USE.**

1. Plug wall pack charger into standard 110/120 volt wall outlet.
2. Connect the wires leading from the battery pack to the wall pack charger connector. Make certain the two connectors are tightly snapped together.
3. To disconnect wires, push down on the connector clip and pull apart.
4. After charging for 4 hours, the battery pack will feel warm. This condition is normal for fully charged batteries.
5. Charging the battery pack for more than 4 hours will not give you longer running time. Four hours is all that is required for a fully charged battery pack.
6. Unlike alkaline batteries, where the power loss is gradual, a NiCd (nickel cadmium) battery will lose all of its power at once. Your R/C vehicle will suddenly stop operating; the vehicle is not defective, but it is time to recharge the battery pack. Running time will be between 15-30 minutes.
7. After use, the battery pack will be hot! Wait at least 20 minutes until the battery pack cools down before recharging. Recharging a warm or hot battery pack will greatly reduce the number of times your battery pack can be recharged.

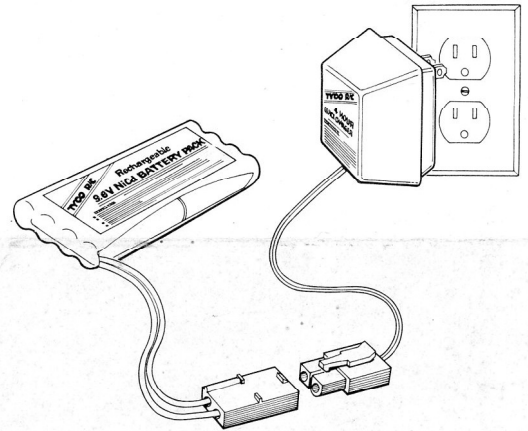

**NOTE:** A 7.2 volt battery charger will not fully charge Tyco's 9.6 volt battery packs. Use only a 9.6 volt charger, such as Tyco's 4-hour Quick Charger.

## BATTERY PACK CARE

- If battery pack and connector are wet, thoroughly dry before charging.
- Battery packs can be charged for much longer periods without harm. However, we recommend unplugging the power pack if battery pack will not be used for several days.

## CAUTIONS

- DO NOT CHARGE BATTERY PACK THAT SHOWS LEAKAGE OR CORROSION.
- DO NOT CHARGE BATTERY PACK IF IT IS HOT.
- DO NOT DISPOSE OF BATTERY PACK IN FIRE.
- DO NOT ATTEMPT TO DISASSEMBLE THE BATTERY PACK BATTERIES.
- DO NOT CHARGE THE BATTERY PACK WHILE IN THE VEHICLE. ALWAYS REMOVE THE BATTERY PACK BEFORE CHARGING.

## ORDER EXTRA RECHARGEABLE NiCd BATTERY PACKS

ITEM	DESCRIPTION	PRICE	QTY	TOTAL
B-2998	Rechargeable 9.6V Turbo Battery Pack	\$26.00		
B-2997	9.6V Wall Pack Charger	\$10.00		

(Enclose charge card information, check or money order (no stamps) for total amount; or call us Toll Free: 1-800-257-7728 (New Jersey Residents call: 1-800-322-8011))

NAME \_\_\_\_\_  
 ADDRESS \_\_\_\_\_  
 CITY \_\_\_\_\_  
 STATE \_\_\_\_\_ ZIP CODE \_\_\_\_\_

MAIL TO: TYCO SERVICE • 540 GLEN AVE. • MOORESTOWN, NJ 08057

MASTER CARD  VISA EXPIRATION DATE \_\_\_\_\_  
 ACCOUNT NO. \_\_\_\_\_  
 SIGNATURE \_\_\_\_\_

FOR OFFICE USE ONLY

DATE	CHECK NO.	AMOUNT

NOVEMBER 1988 ALL PRICES SUBJECT TO CHANGE WITHOUT NOTICE

TOTAL	
HANDLING & POSTAGE	2.00
6% SALES TAX (N.J. RESIDENTS)	
GRAND TOTAL	